


# Mega Liner Plus

» Type: SDP 27 zLT4-CS



## High capacity trailer with hydraulic lifting roof

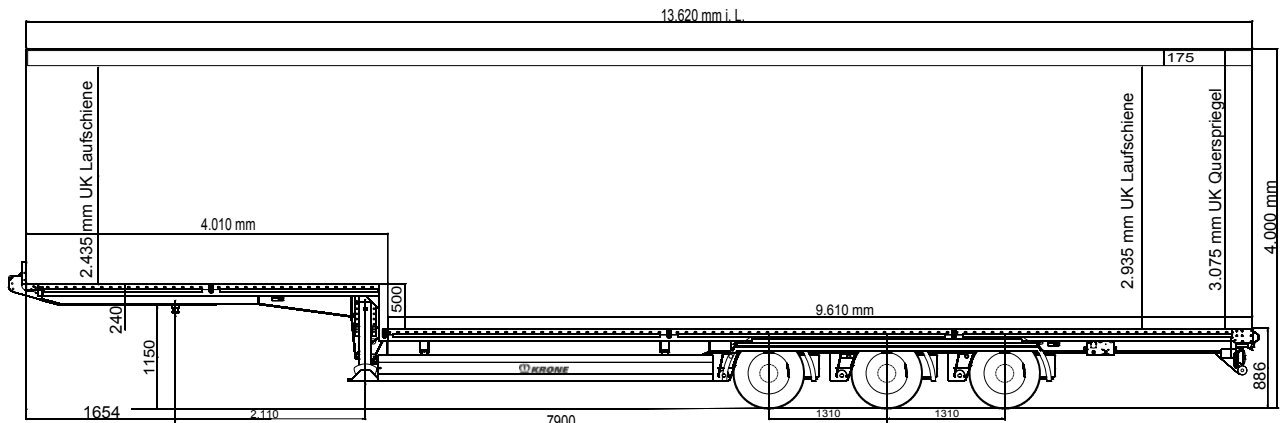


Suitable for towing vehicle according to ISO 1726: (ISO 1726 limited - towing vehicle unit data required)

### Technical Data:

Type:	SDP 27 zLT4-CS
King pin load:	12,000 kg
Axle load (technically possible):	27,000 kg
Allowable gross weight (technically possible):	39,000 kg
Tare weight:	ca. 7,600 kg
Payload (technically possible):	approx.: 31,400 kg
Axle spread:	1,310 / 1,310 mm
Neck height:	240 mm
5th wheel height:	1,150 mm
Side access length:	13,620 mm
Length high deck / low deck:	4,010 / 9,610 mm
Side access width:	2,480 mm
Side access height (high deck / low deck):	2,435 / 2,935 mm
Cranked construction step:	500 mm

### Rear view

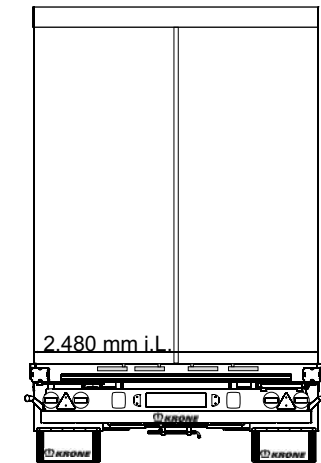

(Dimensions and weights for standard units)

### Technical description:

Multi Lock side rave including load securing positions every 100 mm	Alloy cant rail, continuous, for support of sliding curtain and sliding posts; EDSCHA sliding roof (175) with plastic joints, height 175 mm, grade 0 mm, suitable for automotive boxes according to DIN 15155; Lifting roof, hydraulic, liftable 500 mm at 4 corner posts Adjustable driving height, front, lowering device from basic position 150 mm (in 50 mm steps), reduced lift: 350 mm Adjustable driving height, rear, lowering device from basic position 100 mm (in 50 mm steps), reduced lift: 400 mm; diagonal roof spanning
2 mechanically operated landing legs, 2 x 12 tonnes capacity, half round compensating feet	Front wall reinforced, bolted with solid corner posts; lateral restricted through loading; Front wall reinforced with plywood inner skin; quick release for side curtains on front wall; retainer for curtain cord
Low-maintenance axles with air suspension and drum brakes (300 x 200 mm); raise/lower valve with auto reset; Rims centre nave	Steel container rear doors, reinforced, including bolted steel frame, integrated double door looks and concealed door hinges; roof header hinged and movable
Tyres: 12x 235/75 R 17.5, brand: Krone choice	4 pairs of side posts, positioned opposite each other symmetrically; loading width between side posts 2.480 mm; plank pockets for posts
spare wheel carrier as an option	Delta shaped rubber profiles at rear; delta steel buffers at rear; load security certificate according EN 12642 Code XL
Wheel covering according to EC-regulations; Spray suppression according to EC-guidelines	1 PVC curtain with full lengths vertical reinforcements, top with rollers for sliding curtains, bottom with tensioners, curtain tensioner out of stainless steel
EC braking system including vehicle stabilising system; low-maintenance automatic; spring-loaded hand brake; 2S/2M EBS system, 2 sensors on each axle with RSS, diagnostics on ISO 7638 socket (EBS)	Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; underrun protection and light panel powder coated white for safety reasons; wheels silver with high-quality paint finish; reflective outline marking according to ECE-R48
24 volts lighting system with 2 x 7-pin socket DIN ISO 1185/3731; front and rear marker lights; with two multi-function rear lights acc. to EC incl. rear fog light and reversing lights; 2 large contouring lights with rubber arm in LED; side marker lights in LED	
30 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc.to DIN 283; for floor loadings up to 7 000 kg stacker-truck axle load	

Subject to modifications!  
VF/Beu issue 12/2012

