


## Profi Liner 4 with EasyTarp - Side curtain and pneumatic quick release fastener

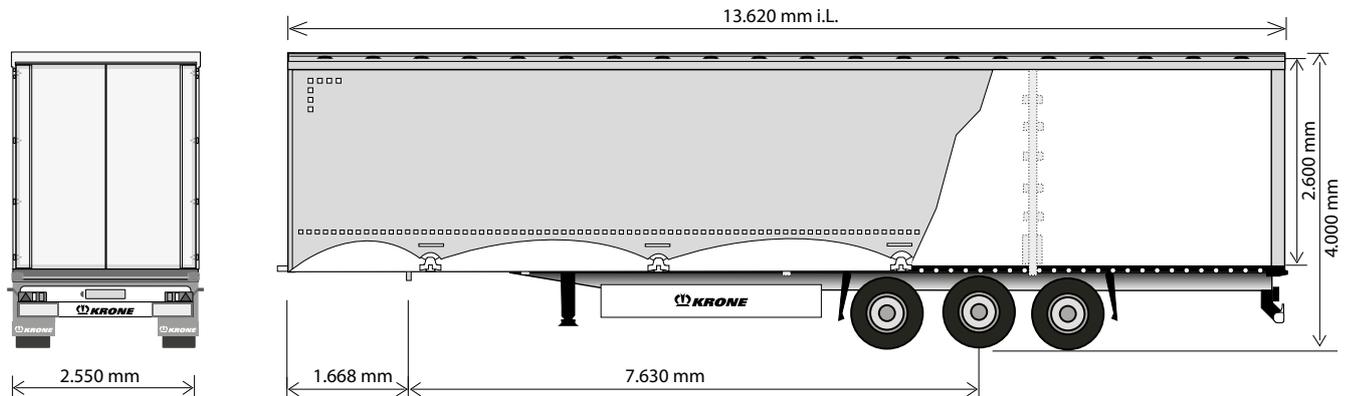

| Technical data:                                |                   |
|--|-------------------|
| Type:  | SDP 27 eLB4-PZ    |
| King pin load:                                 | 12,000 kg         |
| Axle load (technically possible):              | 27,000 kg         |
| Allowable gross weight (technically possible): | 39,000 kg         |
| Tare weight:                                   | approx. 6,290 kg  |
| Payload (technically possible):                | approx. 32,710 kg |
| Axle spread:                                   | 1,310 / 1,310 mm  |
| Neck height:                                   | 125 mm            |
| 5th wheel height:                              | 1,050 - 1,170 mm  |
| Side access length:                            | 13,620 mm         |
| Side access height:                            | 2,575 – 2,800 mm  |
| Side access width:                             | 2,480 mm          |
| Turning radius:                                | 2,040 mm          |

(Dimensions and weights for standard units)

**Multi Lock side rave as standard:**

Award winning Multi Lock side rave including load securing positions every 100 mm. Load securing even diagonally to the driving direction with more than 3000 strapping positions. Cost-effective and with best benefit.



No matter which loads should be transported, with the new Multi Lock- / Multi Blocksytem the loads are perfectly secured.

| Technical description:  |   |
|---|---|
| Multi Lock side rave including load securing positions every 100 mm   | Alloy cant rail, continuous, for support of sliding curtain and posts, sliding roof, height 125 mm, Roof also movable to the front and rear; Diagonal roof spanning; 4 sets of wooden planks  |
| 2 mechanically operated landing legs, 2 x 12 tonnes capacity, half round compensating feet  | Front wall with solid corner posts; lateral restricted through loading; Front wall reinforced with plywood inner skin; retainer for curtain cord  |
| Low-maintenance axles with air suspension and disc brakes (430 mm); raise/lower valve incl. auto reset valve; Rims centre nave  | Steel container rear doors including bolted steel frame, integrated double door looks and concealed door hinges; roof header hinged and movable   |
| Tyres: 6 x 385/65 R 22.5, brand: Krone choice   | 3 pairs of side posts, symmetrical, plank pockets for posts   |
| Wheel covering according to EC-regulations; Spray suppression according to EC-guidelines  | Delta shaped rubber profiles at rear; delta steel buffers at rear; load security certificate according EN 12642 Code XL   |
| spare wheel carrier as an option  | Symmetrical EasyTarp - Side curtain with pneumatic quick release fastener; Roof curtain white   |
| EC braking system including vehicle stabilising system; low-maintenance automatic; spring-loaded hand brake; 2S/2M EBS system, 2 sensors on each axle with RSS, diagnostics on ISO 7638 socket (EBS)  | Steel parts shot blasted, with KTL primer and high-quality surface coating (standard painting single-colour); axles incl. wheel hubs painted black; underrun protection and light panel powder coated white for safety reasons; wheels silver with high-quality paint finish; reflective outline marking according to ECE-R48 |
| 24 volts lighting system with 2 x 7-pin socket DIN ISO 1185/3731; front and rear marker lights; with two multi-function rear lights acc. to EC incl. rear fog light and reversing lights; 2 contouring lights with rubber arm in LED; side marker lights in LED |   |
| 30 mm thick, phenolic coated plywood floor, cut surfaces fully waterproofed and sealed. Strength acc.to DIN 283; for floor loadings up to 7,000 kg stacker-truck axle load  |   |